TURBINE CASE ALIGNMENT & RE-DOWELLING

Operation.
Critical activities to check alignment of all casing, from inlet to exhaust, movement of elements out of correct position and re-dowelling (by boring to diameter greater than original).
Engineering Team provides supervision of all activities of manpower and comprehensive technical report of each step of check.

Working Range.
No limit, activity possible on any model of turbine or other similar machines.

Customization.
Any alignment check requires high Customization. of support tools and technical procedure

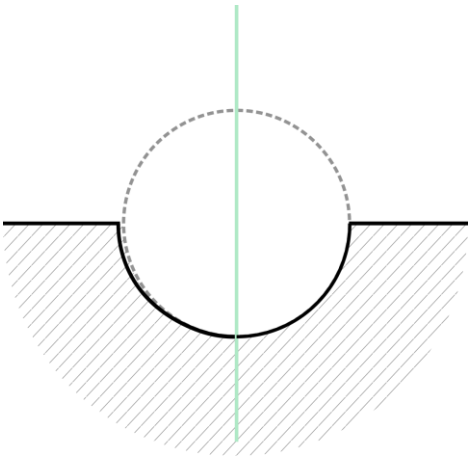

NOTE

24/7 | Worldwide

Site Machining

We perform on-site machining and take care of all those interventions aimed at the restoring of the geometry of mechanical components. In addition to being first-users of a wide range of machine tools, we are resellers and consultants too. Our experience is mostly related to the Oil & Gas Industry, but we easily manage to apply our services in any kind of industry.

site-machining@nuovasimat.com

+39 0586 983108